

SUPRA


Serie Classic
Câbles pour enceinte



Classic 1.6 Mini et 1.6



Classic 4 et 2.5

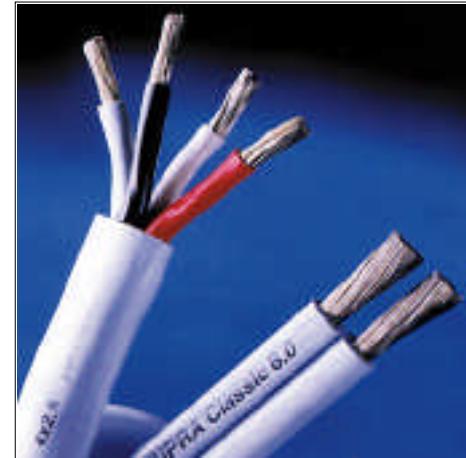

Classic 6 et Rondo 4 x 2.5

Item	Mechanical Specifications								Elec. Specifications	
	Conductor	Cross Sec. Area (mm ² /AWG)	Insulation	Jacket	External Size (mm)	Colour	Weight (g/m)	Length/ bobbin (m / ft)	Resistance (Ω/km)	Inductance (μH/m)
Cl. Mini 1.6	2x90x0.15 OFC, Sn	2x1.6 / 15 AWG	PVC		2.8x5.7	White	39	300m / 984ft	10.8	0.40
Classic 1.6	2x208x0.10 OFC, Sn	2x1.6 / 15 AWG	Chloride Ion- Stabilized PVC		3.1x6.4	Ice Blue	41	300m / 984ft	10.5	0.40
Classic 2.5	2x322x0.10 OFC, Sn	2x2.5 / 13 AWG			3.6x7.4	Ice Blue/Anth. Grey	66	200m / 656ft	6.8	0.45
Classic 4.0	2x511x0.10 OFC, Sn	2x4.0 / 11 AWG			4.7x9.6	Ice Blue	104	100m / 328ft	4.3	0.55
Classic 6.0	2x756x0.10 OFC, Sn	2x6.0 / 9 AWG			5.5x11.2		146	100m / 328ft	2.9	0.59
Rondo 4x2.5	4x322x0.10 OFC, Sn	4x2.5 / 13 AWG	PVC	Ø9.0	Ice Blue/Anth. Grey	140	75m / 246ft	6.8	0.38	